


NSL39-*G*

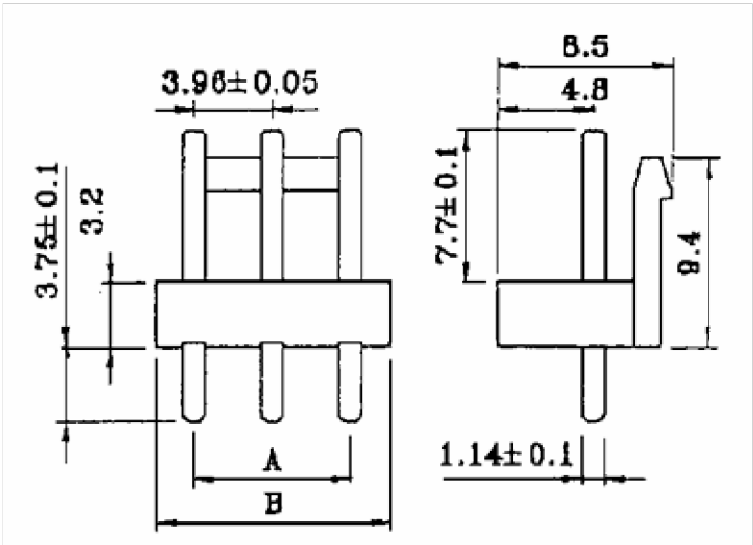

Features

- RoHS compliant

Technical Specifications

Insulation Shell:	Nylon 66 (UL94V-0)
Contacts:	Brass, Tin-plated
Rated Voltage:	250V AC/DC
Rated Current:	7A
Insulation Resistance, Min.:	1GW
Dielectric Strength	1,5KV AC
Temperature Range:	-25...+85°C
Contact Resistance, Max.:	10mW

Dimensions

A:	3,96mm x (Number of Contacts - 1)
B:	3,96mm x Number of Contacts
Pin Cross Section:	1,14x1,14mm